

Fulflo® LT Series

Fulflo® Polymeric Vessels for Water Filtration

Parker Fulflo® LT Series Polymeric Vessels are an ideal economical choice for low flow industrial and potable water applications. Standard and large diameter vessels accommodate 2-1/2 and 4-1/2 inch O.D. double-open-end Fulflo cartridges and meet FDA requirements for use with potable fluids. Both 10-in and 20-in vessels, with or without pressure relief vent, are available. Installation wrenches and brackets are optional.

Benefits

- Fulflo® polymeric vessels are available in two diameters and lengths, with or without relief vent
- The all-polymeric, corrosion-resistant LT series vessels are economical alternatives to stainless steel vessels when high temperature and high pressure are not specified
- All models are made of materials that meet FDA requirements
- The LTG model vessels provide both 1 in and 1-1/2 in NPT connection in same head
- Positive head-to-shell "stop" prevents over tightening
- Unique o-ring design ensures effective sealing by positive tangential contact and eliminates accidental misplacement
- LT model vessels are ideal for Fulflo® bonded, pleated and wound cartridges, as well as activated carbon core models MMCT-10, MC10-2, MC20-2 and MC30-2



- LTG model vessels are ideal for Fulflo® TruBind® 400 series cartridges and 4-1/2 in O.D. wound cartridges in double-open-end style
- Optional installation wrenches accommodate faster cartridge changeout
- Mounting brackets are available for pipe and wall installation
- LT series vessels are tested to industry standards of Water Quality Association for burst pressure, seal integrity, and fatigue resistance

Applications

- Potable Water
- Leisure/Commercial Shipping Bilge Water
- DI Water
- Industrial Discharge
- Alkaline Parts Washing
- Post Oil/Water Separator Polishing
- Process Water
- Compressor Condensate



Fulflo® LT Series

Specifications

Materials of Construction:

White talc-reinforced polypropylene head with clear Styrene-Acrylonitrile (SAN) shell.

Head-to-shell O-ring:

LT model: 2-240 Buna-N
 LTG model: 2-358 Buna-N

Recommended Operating Conditions:

Maximum operating temperature:
 125°F (52°C) @ 100 psi (6.9 bar)
 Maximum operating pressure:
 LT: 150 psi (10.3 bar) @ 75°F (22°C)
 LTG: 125 psi. (8.6 bar) @ 75°F (22°C)

Maximum Recommended Flow Rate:

LT10: 6 gpm (23 lpm)
 LT20: 12 gpm (45 lpm)
 LTG10: 10 gpm (38 lpm)
 LTG20: 20 gpm (76 lpm)

Connection Dimensions:


LT: 3/4 in NPTF
 LTG: 1 and 1-1/2 in NPTF (dual connection)

Accepts Industry Standard Cartridge Sizes (Nominal):

Lengths:
 9-13/16 in (249 mm); 20 in (508 mm) I.D.
 1-1/16 in (27mm)
 O.D. LT: 2-1/2 in (64 mm)
 LTG: 4-1/2 in (114mm)

Optional Seal Configuration:

LT: Accommodates 213 o-ring seal ("PR" cartridge code)

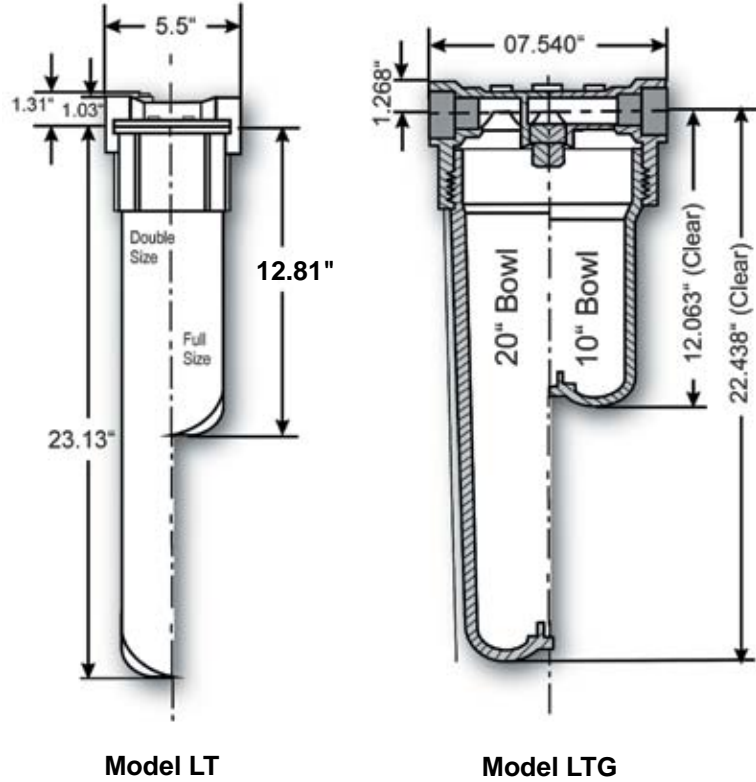

Available Options for LTG Model

Option	Part Number
Wrench for 10 in Shell	6880-6000
Wrench for 20 in Shell	6880-6001
L-Bracket—Wall Mount	0820-6001


Available Options for LT Model

Option	Part Number
Wrench for 10 in Shell	6880-1-005
Wrench for 20 in Shell	6880-1-010
L-Bracket—Wall Mount	0820-6010
U-Bracket—Pipe Mount	0820-6015

Available Vessel Part Numbers

LT Model	LTG Model
LT10	LTG10
LT10V	LTG10V
LT20	LTG20
LT20V	LTG20V

Ordering Information

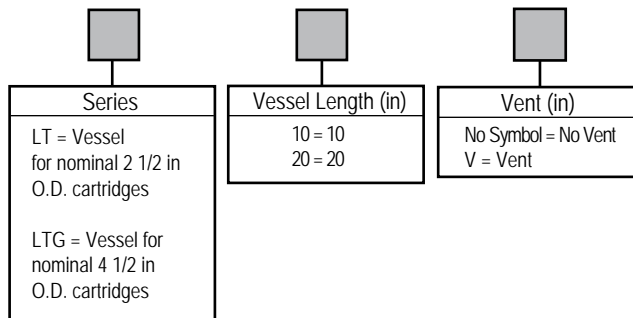

FLOW TECH CORPORATION
 (Toll Free) 877.375.1290
 7601 Stadium Drive Kalamazoo, MI 49009
www.flowtechfilters.com